



LiFePO4 Power Wall Battery

iPower Plus WS48300-150



UN38.3



UL1973 IEC62619

【YiLink LiFePO4 Power Wall Battery】

iPower Plus series LiFePO4 battery is specially tailored for energy storage system, it offers a greater efficiency, higher reliability, intelligent battery management system, intelligent battery monitoring system, long lifespan to your solar energy backup.

iPower Plus series LiFePO4 battery is ideal for off-grid and hybrid applications, offering a solution that's built for the long run and has the ability to be deployed and used in a variety of scenarios, for instance, residential, farm, factory, data room, holiday hotel, etc.




Features and advantages

- Comply with IEC62619, UL1973, CE, ROHS, UN38.3, MSDS
- Intelligence self-protection
- Intelligence management system
- All-around communication interface
- Long cycle life, life > 10 Years @25 degree
- Maintenance free
- Lightweight than equivalent lead-acid batteries
- Easy installation
- Scalability
- LCD indicator



Shenzhen YiLink R&D Center

 Building A4, Shunjing Pioneer Park, Longgang District, Shenzhen, P.R.China

Dongguan YiLink Factory


 Huazhaoxin Industrial Park, Building D, Dongguan, P.R.China

Ganzhou YiLink Factory

 Industrial 2nd Road, YiLink Industrial Park, Ganzhou, Jiangxi, P.R.China

Contact Us

 www.Yilink-energy.com
 info@Yilink-energy.com
 +86 755 28684503

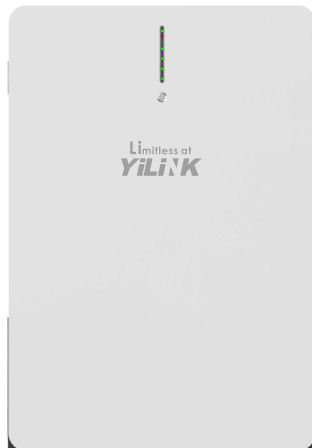

Technical Specification

Series	iPower Plus
Model	WS48300-150
Battery Type	LiFePO4
Nominal Voltage[V]	48
Nominal Capacity[Ah]	300
Nominal Energy[kWh]	14.40
Max. output Power[kW]	7.2
Net Weight[kg]	130
Dimension [mm]W*D*H	550*1000*230
Working Voltage[V]	40~54
Operating Temperature Charging[°C]	0~55
Operating Temperature Discharging[°C]	-20~60
Max. Charge Current[A]	150
Max. Discharge Current[A]	150
Recommend Charge Current[A]	60
Months Self Discharge	≤2%,@35°C
Efficiency of Charge & Discharge	≥99.5% @0.2C
Communication	CAN/RS485/RS232/Dry Contact
Cycle Life ^[1]	≥6000
Certification & Safety Standrd	UL1973/CE/UN38.3/IEC62619/EN61000-3/EN61000-6/RoHS/MSDS
Compatible Inverters	Goodwe/Growatt/Victron/Deye/Voltronic/Sofar/Luxpower More Brands in testing

[1]Test conditions:0.2C Charging/Discharging,@25°C,80% DoD

Shenzhen YiliK R&D Center

 Building A4, Shunjing Pioneer Park, Longgang District, Shenzhen, P.R.China

Dongguan YiliK Factory

 Huazhaoxin Industrial Park, Building D, Dongguan, P.R.China

Ganzhou YiliK Factory

 Industrial 2nd Road, YiLink Industrial Park, Ganzhou, Jiangxi, P.R.China

Contact Us

 www.Yilink-energy.com


 info@Yilink-energy.com

 +86 755 28684503




Curves


Different DOD Cycle Life Curve & 25°C, 0.5C

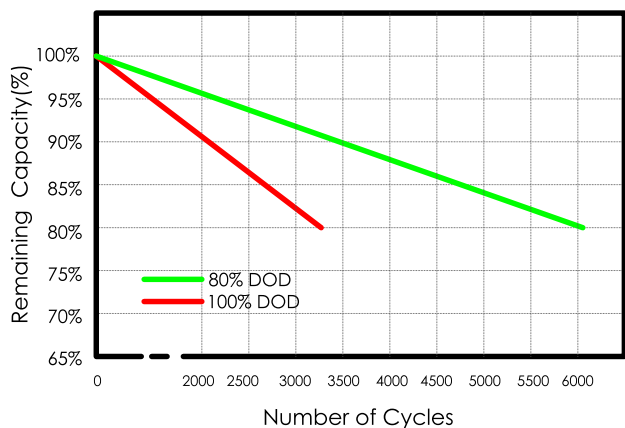


Different Temperature Cycle Life Curve & 0.5C, 80% DOD

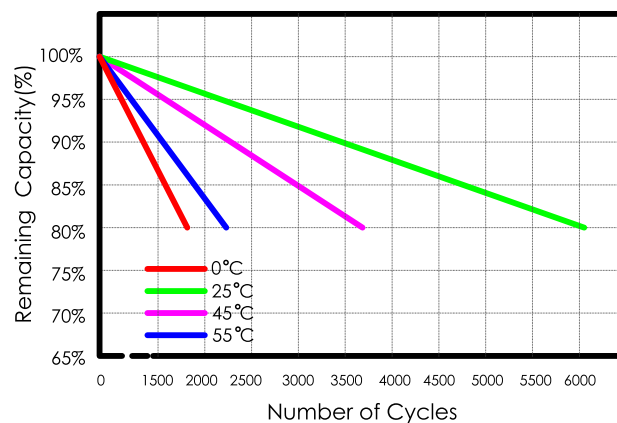


Different Rate Discharge Curve & 25°C

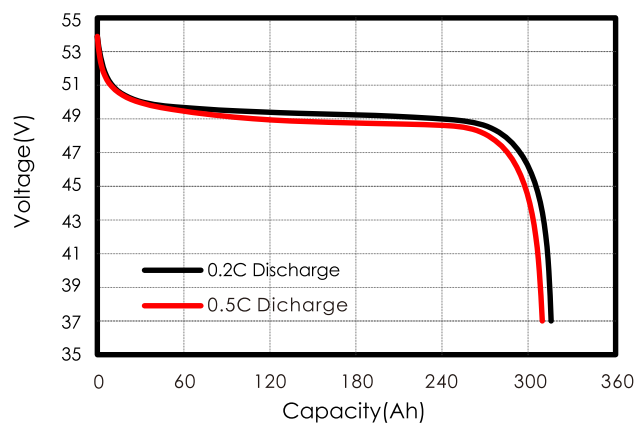


Different Temperature Discharge Curve & 0.5C

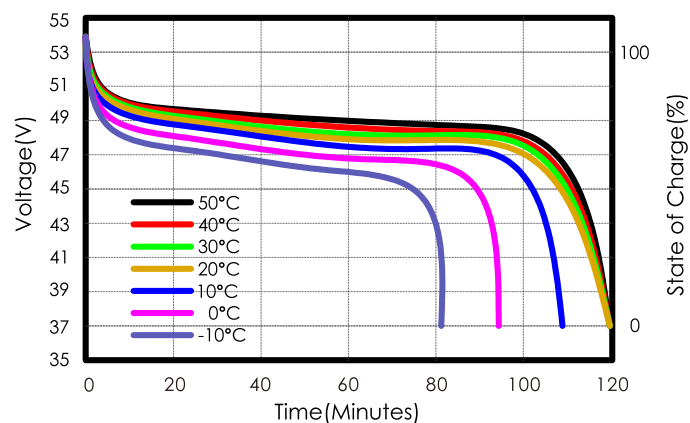

State of Charge Curve & 25°C, 0.5C

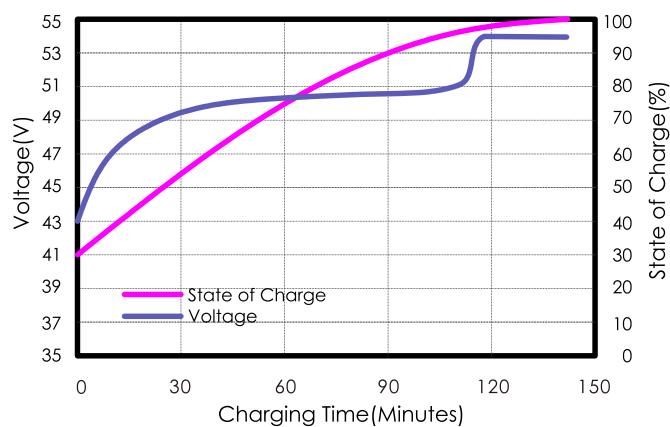

Charging Characteristics & 25°C, 0.5C

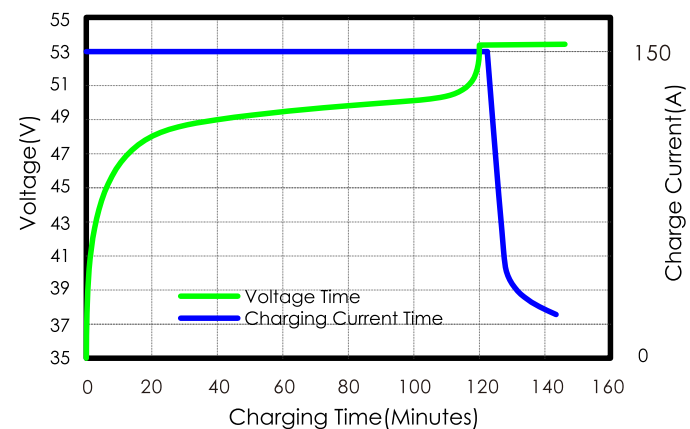

Shenzhen YiLink R&D Center

Building A4, Shunjing Pioneer Park, Longgang District, Shenzhen, P.R.China

Dongguan YiLink Factory

Huazhaoxin Industrial Park, Building D, Dongguan, P.R.China

Ganzhou YiLink Factory

Industrial 2nd Road, YiLink Industrial Park, Ganzhou, Jiangxi, P.R.China


Contact Us

www.Yilink-energy.com


info@Yilink-energy.com

+86 755 28684503

🔌 Different Current Charging & 25°C

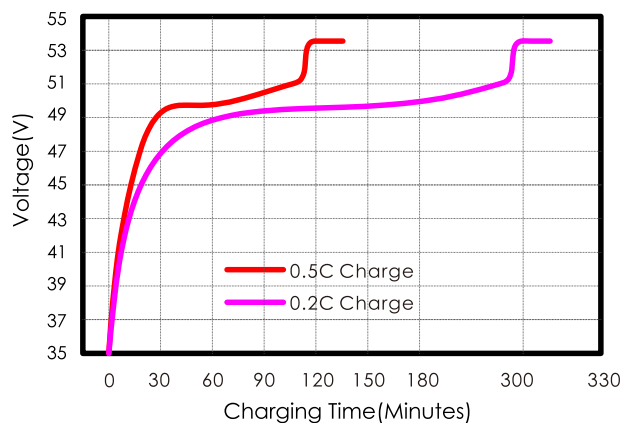

🔌 Charge and Discharge Curve & 25°C, 0.5C

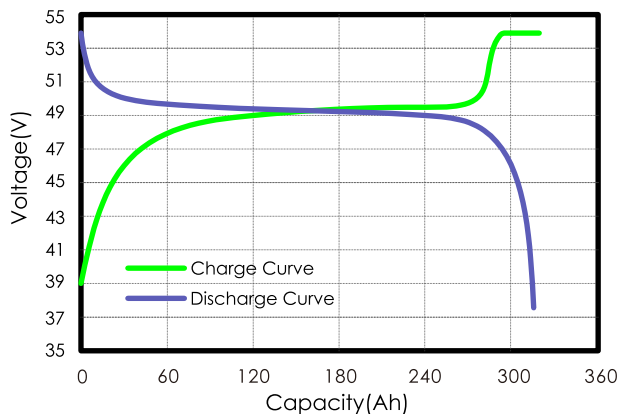

Battery Management System

Alarm & Protection Functions

- Cell over-charge voltage
- Cell over-discharge voltage
- Pack over-charge voltage
- Pack over-discharge voltage
- Over-current charge
- Over-current discharge
- Mos over temperature
- Mos low temperature
- Cell charge low temperature
- Cell charge over temperature
- Cell discharge low temperature
- Cell discharge over temperature
- Environment low temperature
- Environment over temperature
- Short Circuit Protection
- Fault Protection



Features

- Charge equalization function
- SOH estimation function
- SOC estimation function
- LED status indication function
- Dual RS485 communication
- Low power consumption
- Historical data preservation
- Buzzer alarm function
- 4-channel battery temperature detection ($\leq 2^{\circ}\text{C}$)
- Adjustable parameter settings
- High current accuracy ($\leq 2\% \text{ @ FS}$)
- High voltage accuracy ($\leq 20\text{mV}$)
- Real time monitoring function
- With a variety of sleep and wake-up methods

Shenzhen Yilink R&D Center

📍 Building A4, Shunjing Pioneer Park, Longgang District, Shenzhen, P.R.China

Dongguan Yilink Factory

📍 Huazhaoxin Industrial Park, Building D, Dongguan, P.R.China

Ganzhou Yilink Factory

📍 Industrial 2nd Road, Yilink Industrial Park, Ganzhou, Jiangxi, P.R.China

Contact Us

🌐 www.Yilink-energy.com
 📧 info@Yilink-energy.com
 ☎️ +86 755 28684503



Enjoy the sunkiss
Enjoy iPower

YiLiNK

Address: Building A4, Shunjing Pioneer Park, Longgang District, Shenzhen, P.R.China

Email: info@Yilink-energy.com

Web: www.Yilink-energy.com

Tel: +86 755 28684503